

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>H01J 29/28</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 96/17369</b> <b>(43) International Publication Date:</b> 6 June 1996 (06.06.96)
<b>(21) International Application Number:</b> PCT/GB95/02761 <b>(22) International Filing Date:</b> 27 November 1995 (27.11.95)  <b>(30) Priority Data:</b> 9424175.9 30 November 1994 (30.11.94) GB  <b>(71) Applicant (for all designated States except US):</b> COOKSON GROUP PLC [GB/GB]; 130 Wood Street, London EC2V 6EQ (GB).  <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> ADEBAYO, Adelaide, Titilayo, Oluronke, Morenike [GB/GB]; 110 Queen Emmas Dyke, Witney, Oxon OX8 7E2 (GB). WAGLAND, Alison, Mary [GB/GB]; 13 Delamare Way, Cumnor Hill, Oxford OX2 9HZ (GB). KAREN, Savill [GB/GB]; 14 Glenmoss Avenue, Linburn Erskine, Renfrewshire PA8 6HN (GB).  <b>(74) Agent:</b> BOULT WADE TENNANT; 27 Fumival Street, London EC4A 1PQ (GB).		<b>(81) Designated States:</b> AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> PROCESS OF METALLIZING PHOSPHOR SCREENS  <b>(57) Abstract</b>  A process for the metallization of a phosphor screen which process comprises the steps of: i) applying to a phosphor screen a coating of an aqueous dispersion of a poly(hydroxyalkanoate) and allowing the screen to dry; ii) optionally heating the coated screen to form a coherent polymeric coating; iii) depositing a layer of metal upon the coated screen to form a composite; and iv) heating the composite to a temperature above the decomposition temperature of the poly(hydroxyalkanoate) in order to decompose and/or volatilise the film coating.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



*the technology transfer company*

NERAC, Inc.  
One Technology Drive  
Tolland, Connecticut 06084-3900  
Telephone 860-872-7000  
Fax: 860-875-1749  
Documents: 860-872-9331  
E-Mail: nerac@nerac.com

---

PATENT IMAGE ORDER FOR:


Sybil R. Turner  
Order Number: 00683550  
Patent Number: 09617369  
16 of 20

004668.00

Sybil R. Turner  
Assistant Librarian  
Arnall, Golden, & Gregory  
Suite 2800  
1201 W. Peachtree St.  
Atlanta, GA 30309-3450

Copyright 1999 NERAC Inc. All Rights Reserved

March 29, 1999 TECH.SPEC. - World Wide Web -- Customer Acc



### PROCESS OF METALLIZING PHOSPHOR SCREENS

The present invention relates to a process of metallizing phosphor screens, in particular for cathode ray tubes (CRTs).

The electron permeable, light reflecting aluminium film on the target side of the phosphor screen of a CRT is formed by the evaporation of aluminium onto a smooth film of an organic material formed over the surface of a phosphor screen. This smooth film is subsequently burnt out to leave a mirror-like film of aluminium "tenting" across the top of the phosphor screen.

Various processes for metallizing phosphor screens have been proposed in the prior art and these can generally be classified as solvent based systems and aqueous based systems.

In the solvent based system, the phosphor layer is first wetted with an aqueous based prewet and a solvent based lacquer, comprising an approximately 2% solution of a polymer such as poly(iso-butylmethacrylate) in a solvent such as toluene, is floated on the top of the prewet. The water and solvent are removed by heating leaving a film of the polymeric material approximately 1 $\mu$ m in thickness.

The major disadvantage of this approach is that it involves the use of large quantities of volatile organic solvents, such as toluene, with all the associated environmental concerns.

Aqueous based systems are described in US-A-3067055, US-A-3582389 and US-A-3582390 in which a water-based emulsion of a water insoluble, film forming resin such as an acrylate resin copolymer is coated onto the phosphor screen, the coating is dried, the coated layer is metallized, and the coating of the

resin film volatilized by heating at a temperature of up to about 450°C. The emulsion contains about 5 to 20 weight percent of the resin. In US-A-3582389, the addition of materials to the dispersion is described.

5 A neutralising agent is added to adjust the pH of the dispersion to the range of 4.0 to 8.0. A boric acid complex of poly(vinylalcohol) in an amount of up to 1.0% is added to reduce the blistering of the metal film over bare glass during the baking out step.

10 Colloidal silica, in amounts of up to 25% and soluble silicates, in amounts of up to 2% are added to improve the adherence of the metallized layer to the glass and thereby reduce peeling of the metallized layer subsequent to the baking out step. In US-A-4123563,

15 the addition of ammonium oxalate is described to regulate the porosity of the polymer film and the metal layer. This prevents blisters on the metal film caused by the evaporation of the polymer layer. Similarly, US-A-3582390 describes the use of hydrogen

20 peroxide for the same purpose.

One disadvantage of the aqueous based system is that the dispersion fills all of the spaces between the phosphor strips or dots and is thus a thicker layer than in the solvent based system. Accordingly,

25 the amount of polymer left on the screen is greater than that utilized in solvent based processes and is therefore more difficult to remove. Consequently, increased energy requirements may result from the application of extended or even multiple burn out

30 steps. An alternative approach is to introduce oxygen into the funnel to assist burn out. This involves increased equipment costs and the hazards associated with using oxygen.

In the solvent based system as described generally

35 above the polymer film solution and the aluminium are

applied to the phosphor screen and then the funnel of a CRT is attached to the screen with a glass frit in an organic binder. It is possible to remove both the polymer film and the organic binder in one heating cycle.

In the aqueous based systems the quantities of polymer to be removed are such as to generally necessitate the bake out of the polymer film before the addition of the funnel of a CRT. Therefore two heating cycles are required with increased energy costs, and greater investment required in the number of ovens and thus also the space required on the manufacturing site.

We have now developed a process of metallizing phosphor screens which is more energy efficient than the prior art methods by utilizing a polymer that burns out at significantly lower temperatures than the acrylates and other polymers which have previously been suggested for use.

Accordingly, the present invention provides a process for the metallization of a phosphor screen which process comprises the steps of:

- i) applying to a phosphor screen a coating of an aqueous dispersion of a poly(hydroxy-alkanoate) and allowing the screen to dry;
- ii) optionally heating the coated screen to form a polymeric coating;
- iii) depositing a layer of metal upon the coated screen to form a composite; and
- iv) heating the composite to a temperature above the decomposition temperature of the poly(hydroxyalkanoate) in order to decompose and/or volatilise the film coating.

The phosphor screens which are metallized in accordance with the process of the present invention

are generally used in the formation of cathode ray tubes, such as colour television picture tubes or display tubes. At least one and preferably three patterns of successively deposited red-emitting, green-emitting and blue-emitting phosphor strips or dots are arranged in a predetermined pattern on the innersurface of a glass panel to form a luminescent phosphor screen.

In accordance with the method of the present invention the phosphor screen is coated with the desired quantity of an aqueous dispersion of a poly(hydroxyalkanoate). The aqueous dispersion will generally contain from 1.0 to 50% by weight of the poly(hydroxyalkanoate), preferably 10 to 35% by weight of the poly(hydroxyalkanoate).

The poly(hydroxyalkanoate) is preferably poly(3-hydroxybutyrate), poly(3-hydroxyvalerate), or a copolymer of 3-hydroxybutyric acid and 3-hydroxyvaleric acid. Suitable copolymers may comprise, for example 60 to 90% by weight of 3-hydroxybutyric acid and 40 to 10% by weight of 3-hydroxyvaleric acid. Suitable poly(alkanoates) which can be made into a dispersion for use in the present invention are sold under the Trade Name Biopol (Zeneca Specialities). Alternatively, an aqueous dispersion or latex is available under the name "Biopol Aqueous Slurry" (also Zeneca Specialities).

Other additives which may be included in the dispersion are soluble silicates, colloidal silica, boric acid complex of PVA (as described in US-A-3582389), ammonium oxalate (as described in US-A-4123563), hydrogen peroxide (as described in US-A-3582390), dispersing agents, defoaming agents, antifoam agents, levelling agents and/or thickening agents. The dispersing agent may be included in order



to assist in maintaining the poly(hydroxyalkanoate) in suspension. The thickening agent may be included in the dispersions in order to adjust the rheological properties of the dispersion and to assist in maintaining the integrity of the dispersion on storage, i.e. to prevent the settling out of particles of the poly(hydroxyalkanoate).

The phosphor screen is coated with the poly-(hydroxyalkanoate) dispersion by techniques known in the art. For example, the dispersion may be coated onto a rotating phosphor screen, optionally with tilting of the screen in order to spin off excess dispersion. The dispersion will generally be coated onto the phosphor screen in a thickness of up to 25 $\mu$ m. It may be advantageous to pre-wet the phosphor screen prior to application of the coating preferably with a silicate based aqueous solution. This may improve the adhesion of the aluminium to the phosphors.

The coated phosphor screen is then heated, generally to a temperature in the range of from room temperature to 180°C, more preferably 20° to 70°C, in order to form a film of the poly(hydroxyalkanoate). During this heating process the particles of the poly(hydroxyalkanoate) in the dispersion coalesce to form the film. During the heating of the coating the coating is also partially or completely dried.

A metal layer is then deposited onto the coated screen according to techniques known in the art. For the production of CRTs the metal layer is aluminium which is preferably deposited onto the phosphor screen by vacuum evaporation. The aluminium layer preferably has a thickness in the range of from 0.1 to 0.3 $\mu$ m.

After the metal layer has been deposited onto the phosphor screens to form a composite, the composite is then heated to a temperature above the decomposition

temperature of the poly(hydroxyalkanoate) in order to burn out and volatilize the polymeric film coating. The poly(hydroxyalkanoate) decomposes on heating to leave little or no residue. The most preferred  
5 poly(hydroxy-alkanoates) for use in the present invention volatilise or decompose at a temperature of below about 350°C.

A comparison of the relative burn out temperatures of a conventional methacrylate resin system (Rhoplex  
10 B74) and a poly(3-hydroxybutyric acid)/poly(3-hydroxyvaleric acid) copolymer comprising 12 wt% of poly(3-hydroxyvaleric acid) are shown in Figures 1 and 2 of the accompanying drawings. The results shown in  
15 Figures 1 and 2 were obtained by heating the samples at 10°C/minute from room temperature and using a Perkin-Elmer 6 series Thermal Analysis System to record the weight loss.

In putting the process of the present invention into practice, the heating of the composite in step  
20 (iv) may be combined with the step of sealing a cathode ray tube to the phosphor screen, i.e. a separate baking step to volatilise the polymeric film coating becomes unnecessary. The sealing of a cathode ray tube to a metallized phosphor screen is well known  
25 in the art, the seal generally being effected by using a frit sealing process in which a glass frit in an organic binder is used to seal the components together. The oxygen which is present in the cathode ray tube is generally sufficient to assist in the burn  
30 out of the polymeric film coating, although it will be understood that additional air or oxygen-enriched air may be introduced into the cathode ray tube, as necessary. The frit sealing of the metallized phosphor screen to the cathode ray tube will generally  
35 occur at a temperature of about 450°C. The

conventional temperature profile for the sealing cycle is termed a Lehr cycle.

The present invention includes within its scope a phosphor screen which has been metallized by the process of the invention and a cathode ray tube which includes at least one phosphor screen which has been metallized by the process of the invention.

The present invention will be further described with reference to the following Examples in which the following definition is used.

#### Lehr Cycle

The Lehr cycle use in the following Examples is as follows: heat from room temperature to 450°C at 10°C/min, hold at 450°C for 45 minutes and then cool to room temperature.

#### EXAMPLE 1

20

A 3" x 3" pre-cut square of colour TV screen was spun horizontally (with the phosphor side facing upwards) on its axis at 160 r.p.m. for 20 seconds. During this time, ca 10ml of 29% w/w solids 1 $\mu$ m mean particle size Biopol latex (supplied by Zeneca, Specialities batch No: BPL No. 505/1001) was slurried directly onto the spinning TV screen. The screen was re-spun at 160 r.p.m. for 20 seconds to remove excess latex and dried in air at room temperature. The screen was aluminised using an Edwards Coating System E306A. A 1 inch piece of 99.99% pure aluminium wire (0.58 mm diameter) was vaporised at  $1.5 \times 10^{-5}$  mbar to produce an aluminium coating on the TV screen. The screen was heated under the conditions of the Lehr

cycle to leave a shiny flat aluminium film adhering to the phosphors.

#### EXAMPLE 2

5

A 3" x 3" pre-cut square of colour TV screen was spun horizontally (with the phosphor side facing upwards) on its axis at 160 r.p.m. for 20 seconds. During the time, ca 10ml 15% w/w solids 1 $\mu$ m mean  
10 particle size Biopol latex (diluted with water from 29% to 15% w/w solids) (supplied by Zeneca Specialities batch No: BPL No. 505/1001) was slurried directly onto the spinning TV screen. The screen was re-spun at 160 r.p.m. for 20 seconds to remove excess  
15 latex and dried in air at room temperature. The screen was aluminised using an Edwards Coating System E306A. A 1 inch piece of 99.99% pure aluminium wire (0.58 mm diameter) was vaporised at  $1.5 \times 10^{-5}$  mbar to produce an aluminium coating on the TV screen. The  
20 screen was heated under the conditions of the Lehr cycle to leave a shiny flat aluminium film adhering to the phosphors.

#### EXAMPLE 3

25

A 3" x 3" pre-cut square of colour TV screen was spun horizontally (with the phosphor side facing upwards) on its axis at 160 r.p.m. for 20 seconds. During the time, ca 10ml of 42% w/w solids of 0.5 $\mu$ m  
30 mean particle size Biopol latex (supplied by Zeneca Specialities batch No: BPL No. 509/2701) was slurried directly onto the spinning TV screen. The screen was re-spun at 160 r.p.m. for 20 seconds to remove excess latex and dried in air at room temperature. The  
35 screen was aluminised using an Edwards Coating System

E306A. A 1 inch piece of 99.99% pure aluminium wire (0.58mm diameter) was vaporised at  $1.5 \times 10^{-5}$  mbar to produce an aluminium coating on the TV screen. The screen was heated under the conditions of the Lehr cycle to leave a shiny flat aluminium film adhering to the phosphors.

#### EXAMPLE 4

10 A 3" x 3" pre-cut square of colour TV screen was spun horizontally (with the phosphor side facing upwards) on its axis at 160 r.p.m. for 20 seconds. During this time, ca 10ml of 32% w/w solids of  $0.5\mu\text{m}$  mean particle size Biopol latex (supplied by Zeneca Specialities batch No: BPL No. 509/2001) was slurried directly onto the spinning TV screen. The screen was re-spun at 160 r.p.m. for 20 seconds to remove excess latex and dried in air at room temperature. The screen was aluminised using an Edwards Coating System E306A. A 1 inch piece of 99.99% pure aluminium wire (0.58mm diameter) was vaporised at  $1.5 \times 10^{-5}$  mbar to produce an aluminium coating on the TV screen. The screen was heated under the conditions of the Lehr cycle to leave a shiny flat aluminium film adhering to the phosphors.

#### EXAMPLE 5

Biopol powder D600G (supplied by Zeneca Specialities) was wet-milled using a continuous flow process in an attritor mill (supplied by Dyno Mill type KDL). The Biopol (1kg) was added gradually to water (3 litres) and the dispersion was stirred throughout the milling process. A pump controlled the flow-rate of the Biopol dispersion through the mill.

Initially, the pump setting was 20ml/minute to obtain a coarse milling and it was then slowed to 5ml/minute. The particle size of the Biopol milled in this manner measured 1 $\mu$ m in diameter (SEM). The milled Biopol settled and was collected as a cake, which was a 1:1 Biopol:water mixture.

A Biopol dispersion was prepared from the following ingredients:

	Biopol cake	7.5g
10	Dow Corning additive D65	0.03g
	Synperonic PE F/68 (ICI)	0.1g
	Rheovis CR3 (Allied Colloids)	0.12g
	Deionised water	19.75g

The Biopol cake was added to a solution of Dow Corning additive D65 and Synperonic PE F/68 and the mixture stirred at room temperature for 5 minutes using a Silverson Laboratory Mixer. A thickener, Rheovis CR3, was added to the mixture which was then stirred for a further 5 minutes. Ammonium hydroxide (25 wt%) was used to adjust the pH of the dispersion to 8 to 9.5 and the mixture was stirred for 3 minutes. The resultant dispersion was stable for four months.

A 3" x 3" pre-cut square of colour TV screen was wetted with a sodium silicate based prewet solution. The Biopol dispersion produced as detailed above was diluted to 10 wt% Biopol by the addition of deionised water. An 8ml sample of the dispersion was spin coated onto the 3" x 3" pre-wetted TV screen at 80 rpm. The coated screen was then heat-treated in an oven set at 180°C for 12 minutes to form a uniform film of Biopol on the screen.

Aluminium was vapour deposited onto the screen produced as described above using the Edwards

Coating System E 306A. The screen was heated under a typical Lehr cycle up to a maximum of about 450°C. During this heating cycle, the organic substances in the Biopol film volatilised leaving a mirror finish of aluminium on the screen.

#### EXAMPLE 6

Biopol cake, prepared according to Example 5 (7.5g) was added to a solution of antifoam DNE-Bayer (0.075g) and Tagat L2-Goldschmidt (0.25g) in water (11.75g). The mixture was stirred for 2 minutes with a paddle mixer at 500 rpm. Viscalex HV 30-Allied Colloids (0.3g) was added and the mixture was stirred for a further minute. The pH of the dispersion was adjusted to 8 to 9.5 using ammonium hydroxide (25 wt%). An 8ml sample of this dispersion was used to coat a 3 x 3" TV screen as described in Example 1. The coated screen was then heat-treated in an oven set at 180°C for 12 minutes to form a uniform film of Biopol on the screen.

Aluminium was vapour deposited onto the screen produced as described above using the Edwards Coating Systems E306A. The screen was heated under a Lehr cycle to a maximum of about 450°C. During this heating cycle, the organic substances in the Biopol film volatilised leaving a mirror finish of aluminium on the screen.

**CLAIMS:**

1. A process for the metallization of a phosphor screen which process comprises the steps of:

5

- i) applying to a phosphor screen a coating of an aqueous dispersion of a poly(hydroxyalkanoate) and allowing the screen to dry;
- 10 ii) optionally heating the coated screen to form a coherent polymeric coating;
- 15 iii) depositing a layer of metal upon the coated screen to form a composite; and
- iv) heating the composite to a temperature above the decomposition temperature of the poly(hydroxyalkanoate) in order to decompose and/or volatilise the film coating.

20 2. A process as claimed in claim 1 wherein the poly(hydroxyalkanoate) is a poly(3-hydroxybutyrate), a poly(3-hydroxyvalerate) or a copolymer of 3-hydroxybutyric acid and 3-hydroxyvaleric acid.

25 3. A process as claimed in claim 1 or claim 2 wherein the aqueous dispersion coated onto the phosphor screen comprises from 1.0 to 50.0% by weight of the poly(hydroxyalkanoate), preferably 10 to 35% by weight.

30 4. A process claimed in any one of the preceding claims wherein the dried coating of poly(hydroxyalkanoate) has a thickness of up to 25 $\mu$ m.

35 5. A process claimed in any one of the preceding claims wherein the coated screen is heated in step



(ii) under conditions such that a coherent polymeric film is formed in the phosphor screen.

5        6. A process as claimed in any one of the preceding claims wherein the metal which is deposited upon the coated screen is aluminium.

10       7. A process as claimed in claim 6 wherein the layer of aluminium is deposited upon the coated screen by vacuum evaporation.

15       8. A process as claimed in claim 7 wherein the layer of aluminium has a thickness in the range of from 0.1 to 0.3  $\mu\text{m}$ .

20       9. A process as claimed in any one of the preceding claims wherein the volatilisation decomposition of the poly(hydroxyalkanoate) is effected at a temperature of below 350°C.

25       10. A process as claimed in any one of the preceding claims wherein the aqueous dispersion additionally includes therein hydrogen peroxide.

30       11. A process as claimed in any one of the preceding claims wherein the aqueous dispersion additionally, includes therein one or more of a soluble silicate, colloidal silica, a dispersing agent, an antifoaming agent, a defoaming agent, a levelling agent or a thickening agent.

35       12. A process as claimed in any one of the preceding claims wherein the heating of the composite in step (iv) is effected during the sealing of a funnel of a cathode ray tube to the phosphor screen.


13. A process as claimed in claim 13 wherein the maximum temperature reached during the sealing step is about 450°C.

5        14. A phosphor screen which has been metallized by a process as claimed in any one of the preceding claims.

10       15. A cathode ray tube which includes at least one phosphor screen which has been metallized by a process as claimed in any one of the preceding claims.


1/2

FIG. 1

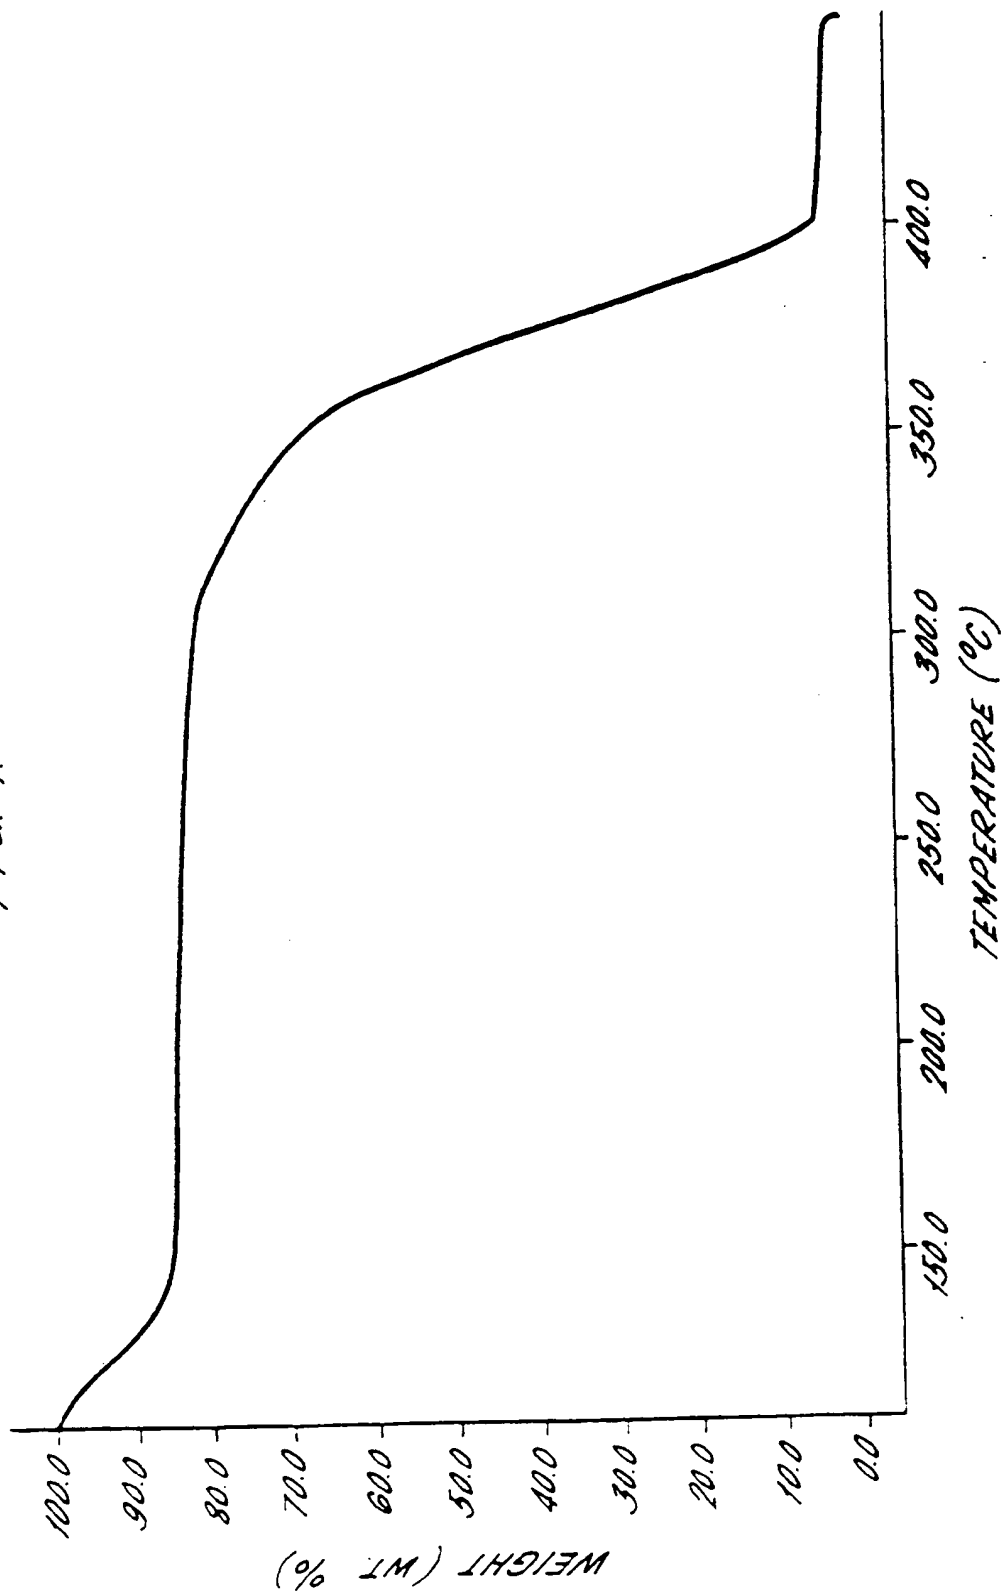

2/2

FIG. 2.

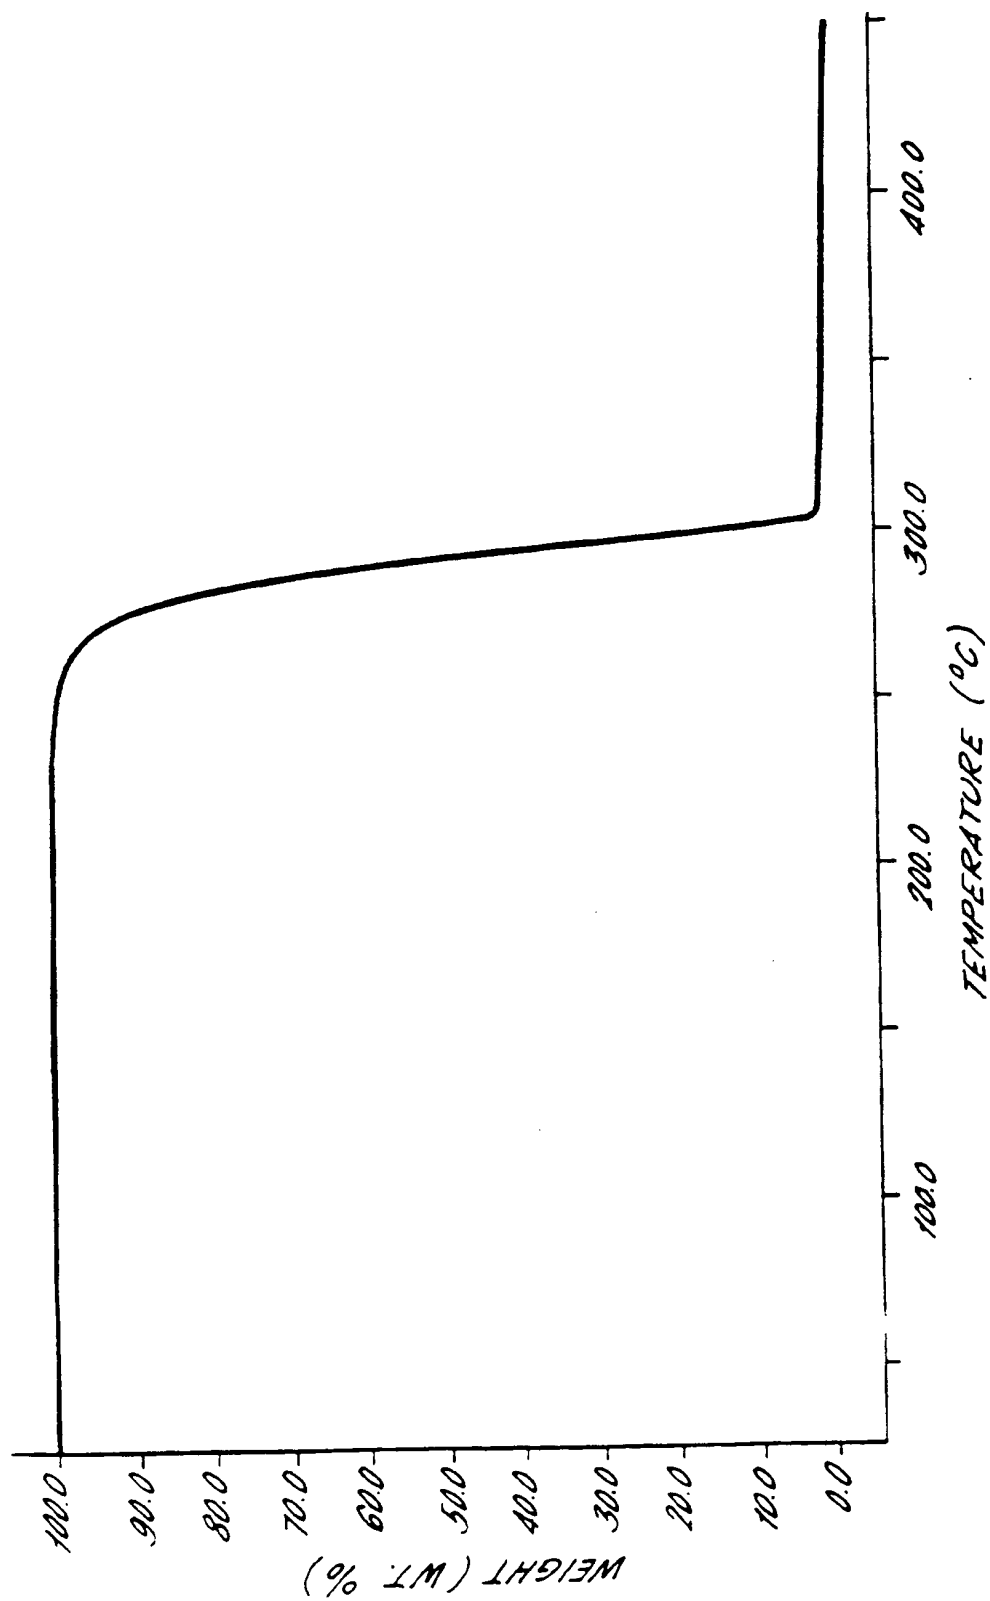

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 95/02761

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H01J29/28

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,2 273 998 (DE LA RUE HOLOGRAPHICS) 6 July 1994 see the whole document -----	1-11

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \* "A" document defining the general state of the art which is not considered to be of particular relevance
- \* "E" earlier document but published on or after the international filing date
- \* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \* "O" document referring to an oral disclosure, use, exhibition or other means
- \* "P" document published prior to the international filing date but later than the priority date claimed

- \* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* "A" document member of the same patent family

Date of the actual completion of the international search

12 February 1996

Date of mailing of the international search report

23.02.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Drouot, M-C

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 95/02761

Patent document  
cited in search report

Publication  
date

Patent family  
member(s)

Publication  
date

GB-A-2273998

06-07-94

NONE